



Disco doppio
Double blade



Semi-Automatica
Semi-Automatic



Gruppi indipendenti
Independent units

DM2

ATTESTATRICE DOPPIO DISCO CON POSIZIONAMENTO CONTROLLATO
DOUBLE BLADE CROSS CUTTING MACHINE WITH CONTROLLED POSITIONING

ATTESTATRICE DISCO DOPPIO CON POSIZIONAMENTO CONTROLLATO

DOUBLE BLADE CROSS CUTTING MACHINE WITH CONTROLLED POSITIONING

DM2


L'attestatrice tipo **DM2** unisce alla possibilità di taglio con doppio disco la precisione e la velocità di posizionamento del mandrino mobile, grazie all'utilizzo di tecnologie d'avanguardia nel taglio di strisce di marmo e granito. Trova applicazione nel taglio consecutivo di misure differenti ed è ideale per il taglio di materiale da recupero.

- ✓ Banco a rulli folli
- ✓ Dotata di un gruppo fisso e uno mobile
- ✓ Gruppi che possono lavorare indipendentemente o in sincronia
- ✓ Precisione e velocità di posizionamento del gruppo mobile tramite comando su touch screen
- ✓ Taglio a misura random con joystick
- ✓ Taglio con 5 pulsanti preimpostati a misure differenti
- ✓ Ampia flessibilità nella produzione
- ✓ Trasmissione potenza motore tramite cinghie (non a presa diretta)

DM2 cross cutting machine combines the possibility of cutting with two units with the precision of positioning of the moving spindle, employing advanced technologies when cutting strips of marble and granite. It finds its application in consecutive cutting of different sizes and it is ideal for recovering scrap material.

- ✓ Idle roller table
- ✓ Fixed cutting unit and a mobile cutting unit
- ✓ Units can work separately or synchronized
- ✓ Precision and speed in positioning of the mobile unit controlled by touch screen
- ✓ Random measure cutting with joystick
- ✓ Cutting with push buttons preset at different sizes
- ✓ Utmost production flexibility
- ✓ Belt-driven power transmission (no direct power transmission to motor)

MODELLO / MODEL	DM2
Larghezza utile di taglio Useful cutting width	610 mm
Spessore massimo di taglio Maximum cutting thickness	100 mm
Diametro dischi Blade diameter	400 mm
Tipo di banco Type of table	A rulli folli Idle rollers
Distanza regolabile tra i 2 dischi Adjustable distance between 2 blades	min 150 mm max 610 mm
Potenza motore disco / dischi Blade / Blades motor power	9,2 kW per disco / blade
Potenza installata Installed power	21 kW
Consumo acqua Water consumption	40 l/min
Consumo aria Air consumption	10 l/min
Ingombri - Peso Overall dimensions - Weight	3650 x 2300 x 2000/h mm 2,45 t circa

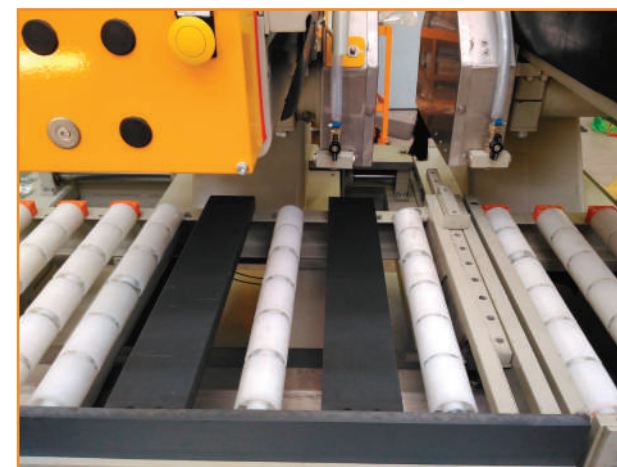

donatoni.com



Costruzioni Meccaniche Donatoni

Loc. Montean, 9 - 37010 Cavaion V.se (VR) Italia
Tel. +39 045 6260275 - info@donatoni.com

